

B 28 Plus - B 38 Plus - B 46 Plus - B 70 Plus - B 86 Plus



104523-104538-104548-104583-104593

Bartscher GmbH
Franz-Kleine-Str. 28
D-33154 Salzkotten
Germany

Phone: +49 5258 971-0

Fax: +49 5258 971-120














Technical Support Hotline: +49 5258 971-197

www.bartscher.com



Version: 1.0

Date of preparation: 2021-12-10

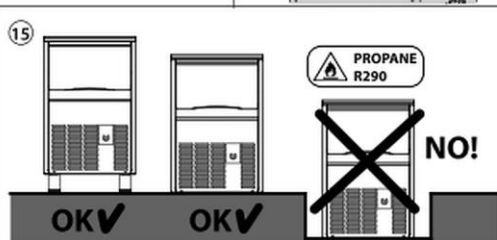

16




17



18



19

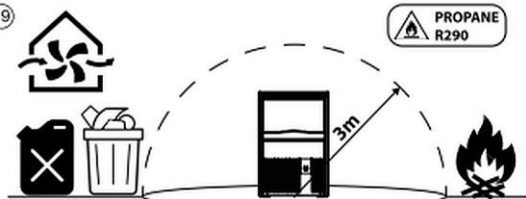

Quick Start Guide



TOUCH



3"



STOP
START



Operation status

LED indicator status

Standby

every 30"

Storage container full

every 10"

Production cycle start

every 0.5"

Ice production


ON

Alarm blackout

ON 5" + OFF

Cleaning cycle













ON 3" + OFF



In case of alarm:

1. To turn the buzzer off, touch a control key.
2. Touch a control key again to reset the alarm (should it be stopped beforehand).

ATTENTION! Should subsequent alarms appear, contact the service company.

 Setting Ice cube weight	 Setting Storage container probe
<p>① Ice phase  3 TIMES TOUCH </p>	<p>① Standby phase  3 TIMES TOUCH </p>
<p>② WHITE RED  Setting change through a touch </p>	<p>② WHITE RED  Setting change through a touch </p>
<p>③  After 60" the setting is saved</p>	<p>③  After 60" the setting is saved</p>

Original instruction manual

1	Safety	2
1.1	Explanation of Signal Words.....	2
1.2	Safety instructions.....	3
1.3	Intended Use	5
1.4	Unintended Use	5
2	General information	6
2.1	Liability and Warranty	6
2.2	Copyright Protection	6
2.3	Declaration of Conformity	6
3	Transport, Packaging and Storage	7
3.1	Delivery Check.....	7
3.2	Packaging	7
3.3	Storage	7
4	Technical Data.....	8
4.1	Technical Specifications	8
4.2	List of Components of the Appliance	13
4.3	Operation	14
5	Installation and operation	14
5.1	Installation.....	14
5.2	Operation	18
6	Cleaning	22
6.1	Safety Instructions for Cleaning	22
6.2	Cleaning.....	22
7	Possible Malfunctions.....	26
8	Disposal.....	29



Read this instruction manual before using and keep it available at all times!

This instruction manual contains information about installation, operation and maintenance of the appliance and constitutes an important source of information and reference guide. The knowledge of all operational and safety instructions included in this manual is a prerequisite for safe and proper handling of the appliance. Additionally, accident prevention, occupational health and safety, and legal regulations in force in the area the appliance is used apply.

Before you start using the appliance, especially before turning it on, read this instruction manual in order to avoid personal injuries and property damages. Improper use may cause damage.

This instruction manual forms an integral part of the product and must be stored in an immediate vicinity of the appliance and be available at all times. The instruction manual should be transferred together with the appliance.

1 Safety

EN

This appliance has been manufactured in accordance with technical standards currently in force. However, the appliance may be a source of hazards if used improperly or contrary to its intended purpose. All persons using the appliance must consider information included in this instruction manual and observe safety instructions.

1.1 Explanation of Signal Words

Important safety instructions and warning information are indicated in this instruction manual with appropriate signal words. You must strictly follow the instructions, to prevent accidents, personal injuries and property damages.



DANGER!

The signal word **DANGER** warns against hazards that lead to severe injuries or death if the hazards are not avoided.



WARNING!

The signal word **WARNING** warns against hazards that may lead to moderate or severe injuries or death if the hazards are not avoided.



CAUTION!

The signal word **CAUTION** warns against hazards that may lead to light or moderate injuries if the hazards are not avoided.

IMPORTANT!

The signal word **IMPORTANT** indicates possible property damages, which may occur if safety instructions are not observed.

NOTE!

The symbol **NOTE** indicates subsequent information and guidelines for the user on usage of the appliance.

1.2 Safety instructions

Electrical Current

- Too high a mains voltage or incorrect installation may cause electric shock.
- The appliance may be connected only if data on the rating plate correspond with the mains voltage.
- To avoid short-circuit, the appliance should be kept dry.
- If there are malfunctions during operation, disconnect the appliance from the power supply.
- Do not touch the appliance's plug with wet hands.
- Never take hold of the appliance if it has fallen into water. Immediately disconnect the appliance from the power supply.
- Any repairs or housing opening may be carried out by professionals and relevant workshops only.
- Do not transport the appliance, holding it by the power cord.
- Do not allow the power cord to come into contact with heat sources or sharp edges.
- Do not bend, pinch nor knot the power cord.

- Always completely unwind the power cord.
- Never place the appliance or other objects on the power cord.
- Always take hold of the plug to disconnect the appliance from the power supply.
- Check the power cord regularly for damage. Do not use the appliance if the power cord is damaged. If this cable is damaged, it must be replaced by customer service or a qualified electrician in order to avoid dangers.

Fire hazard / flammable materials hazard / explosion hazard!

- Do not use any electric devices in the appliance.
- Do not store nor use petrol or other flammable liquids and gases in the vicinity of this or any other appliance. Those gases may cause fire or explosion hazard.
- Do not put into the appliance any explosive materials, like sprays filled with flammable propellants. Contents of containers filled with flammable gases and liquids may leak in low temperatures, and the contents may catch fire from sparks generated by an electric appliance. Explosion hazard!
- In the case of coolant leakage, pull the plug from the socket. Remove all sources of ignition in the vicinity, ventilate room and contact technical service. Avoid coolant getting in contact with eyes, as it may cause serious eye damage.
- Never use any flammable liquids for cleaning the appliance or its parts. Gases released may cause fire or explosion hazard.
- In the case of fire, disconnect the appliance from the power supply before attempting adequate fire-extinguishing actions.
- Never attempt to extinguish fire with water if the appliance is connected to the power supply. Following extinction of fire, ensure sufficient fresh air inflow.
- Defrosting process may not be sped up with mechanical means or heat energy sources (candles or heaters) nor with any other means. Vapour produced may cause short-circuit and too high temperatures may damage the appliance.
- All ventilation slots should not be obstructed during operation.
- Never attempt to damage cooling installation of the appliance.

Operating personnel

- This appliance is not intended to be used by persons (including children) with limited physical, sensory or mental capabilities, nor by persons with limited experience and/or limited knowledge.
- Children should be supervised to ensure that they are not playing with or switching the appliance on.

Improper Use

Safety

- Unintended or prohibited use may cause damage to the appliance.
- The appliance may only be used when its technical condition is flawless and allows for safe operation.
- The appliance may only be used when all connections are executed according to rules of law in force.
- The appliance may only be used when it is clean.
- Use only original spare parts. Never attempt to repair the appliance on your own.
- Do not introduce any changes in the appliance nor modify it.

1.3 Intended Use

As described below, every use of the appliance for a purpose differing and/or diverging from its intended standard use, is prohibited and considered to be an unintended use.

The following is an intended use:

- Ice cubes preparation.

The appliance is intended for professional use only.

EN

1.4 Unintended Use

An unintended use may lead to personal injuries or property damages caused by hazardous voltage, fire or high temperature. The appliance may only be used to perform tasks described in this instruction manual.

2 General information

2.1 Liability and Warranty

All information and instructions in this instruction manual account for legal regulations in force, current level of technical engineering knowledge as well as our expertise and experience, developed over the years. If special models or additional options are ordered, or state-of-the-art technical solutions were implemented, the actual scope of delivery of the appliance may, in some circumstances, differ from descriptions and numerous drawings in this instruction manual.

The manufacturer is not liable for any damages nor faults stemming from:

- failure to observe instructions,
- unintended use,
- technical alterations introduced by the user,
- usage of unapproved spare parts.

We reserve the right to introduce technical modifications to the product, intended for improvement of the appliance and its performance.

EN

2.2 Copyright Protection

This instruction manual, and texts, drawings and images included in it, as well as its other components are copyright protected. It is prohibited to reproduce this instruction manual (including its excerpts), in any form and by any means, and to use and/or transfer its content to third parties without manufacturer's written permission. Violation of the above results in obligation to pay compensation. We reserve the right to claim further damages.

2.3 Declaration of Conformity

The appliance meets the currently applicable standards and guidelines of the European Union. We confirm the above in the EC Declaration of Conformity. We may provide relevant Declaration of Conformity upon request.

3 Transport, Packaging and Storage

3.1 Delivery Check

Immediately upon reception, check the delivery for completeness and possible shipping damage. In the case of visible transport damage refuse to accept the appliance or accept it conditionally. Mark and note the scope of damage in shipping documents/consignment list of the shipping company and lodge a complaint.

Concealed damage must be reported immediately upon its discovery, as compensation claims may only be filed within applicable time limits.

If you find that parts or accessories missing, please contact our Customer Service Department.

3.2 Packaging

Do not dispose of the appliance cardboard box. It may be used to store the appliance when relocating or when shipping the appliance to our service point in the case of any damages.

The packaging and its elements are made of recyclable materials. Particularly, these are: plastic films and bags, cardboard box.

When disposing of the packaging, observe applicable domestic regulations. Recyclable packaging materials should be recycled.

EN

3.3 Storage

Leave the packaging closed until installation of the appliance; observe external indications concerning method of placing and storage. Store the packaging in the following conditions only:

- in closed rooms;
- in dry and dust-free surrounding;
- away from aggressive agents;
- in a location protected against sunlight;
- in a location protected against mechanical shocks.

In the case of extended storage (over three months), make sure you check the condition of the packaging and the parts regularly. If needed, replace the packaging with a new one.

4 Technical Data

4.1 Technical Specifications

Name:	Ice-cube maker B 28 Plus
Art. No.:	104523
Material:	stainless steel, plastic, steel galvanised
Ice cube design:	tapered form (full taper)
Number of ice cube sizes:	1
Ice cube size (W x D x H), in mm:	35 x 37 x 32
Ice cube weight, in g:	20
Ice cubes output / work cycle:	18
Max. production, in kg / hour:	28 / 24
Storage container capacity, in kg / in ice cubes, pcs:	6,5 / 325
Coolant, amount in kg:	R290 / 0,080
Climate class:	T
Water connection:	3/4"
Water outlet, Ø in mm:	20
Connected load:	0,3 kW 220-240 V 50 Hz
Dimensions (W x D x H), in mm:	340 x 485 x 625
Weight, in kg:	28,2

Name:	Ice-cube maker B 38 Plus
Art. No.:	104538
Material:	stainless steel, plastic, steel galvanised
Ice cube design:	tapered form (full taper)
Number of ice cube sizes:	1
Ice cube size (W x D x H), in mm:	35 x 37 x 32
Ice cube weight, in g:	20
Ice cubes output / work cycle:	28
Max. production, in kg / hour:	38 / 24
Storage container capacity, in kg / in ice cubes, pcs:	11,5 / 575
Coolant, amount in kg:	R290 / 0,070
Climate class:	T
Water connection:	3/4"
Water outlet, Ø in mm:	20
Connected load:	0,59 kW 220-240 V 50 Hz
Dimensions (W x D x H), in mm:	500 x 540 x 700
Weight, in kg:	38,2

Name:	Ice-cube maker B 46 Plus
Art. No.:	104548
Material:	stainless steel, plastic, steel galvanised
Ice cube design:	tapered form (full taper)
Number of ice cube sizes:	1
Ice cube size (W x D x H), in mm:	35 x 37 x 32
Ice cube weight, in g:	20
Ice cubes output / work cycle:	28
Max. production, in kg / hour:	46 / 24
Storage container capacity, in kg / in ice cubes, pcs:	15 / 750
Coolant, amount in kg:	R290 / 0,080
Climate class:	T
Water connection:	3/4"
Water outlet, Ø in mm:	20
Connected load:	0,68 kW 220-240 V 50 Hz
Dimensions (W x D x H), in mm:	500 x 580 x 800
Weight, in kg:	42,6

Name:	Ice-cube maker B 70 Plus
Art. No.:	104583
Material:	stainless steel, plastic, steel galvanised
Ice cube design:	tapered form (full taper)
Number of ice cube sizes:	1
Ice cube size (W x D x H), in mm:	35 x 37 x 32
Ice cube weight, in g:	20
Ice cubes output / work cycle:	56
Max. production, in kg / hour:	70 / 24
Storage container capacity, in kg / in ice cubes, pcs:	42 / 2100
Coolant, amount in kg:	R290 / 0,100
Climate class:	T
Water connection:	3/4"
Water outlet, Ø in mm:	20
Connected load:	0,88 kW 220-240 V 50 Hz
Dimensions (W x D x H), in mm:	700 x 580 x 995
Weight, in kg:	53,0

Name:	Ice-cube maker B 86 Plus
Art. No.:	104593
Material:	stainless steel, plastic, steel galvanised
Ice cube design:	tapered form (full taper)
Number of ice cube sizes:	1
Ice cube size (W x D x H), in mm:	35 x 37 x 32
Ice cube weight, in g:	20
Ice cubes output / work cycle:	56
Max. production, in kg / hour:	86 / 24
Storage container capacity, in kg / in ice cubes, pcs:	42 / 2100
Coolant, amount in kg:	R290 / 0,090
Climate class:	T
Water connection:	3/4"
Water outlet, Ø in mm:	20
Connected load:	0,98 kW 220-240 V 50 Hz
Dimensions (W x D x H), in mm:	700 x 580 x 995
Weight, in kg:	63,0


EN

Version / Characteristics

- Cooling: air-cooled
- Fill level sensor
- Production by means of spray system
- Control: electronic
- Cleaning function
- ON/OFF switch
- Indicator light
- Can be integrated
- The set includes: 1 ice shovel

We reserve the right to implement technical modifications.

4.2 List of Components of the Appliance

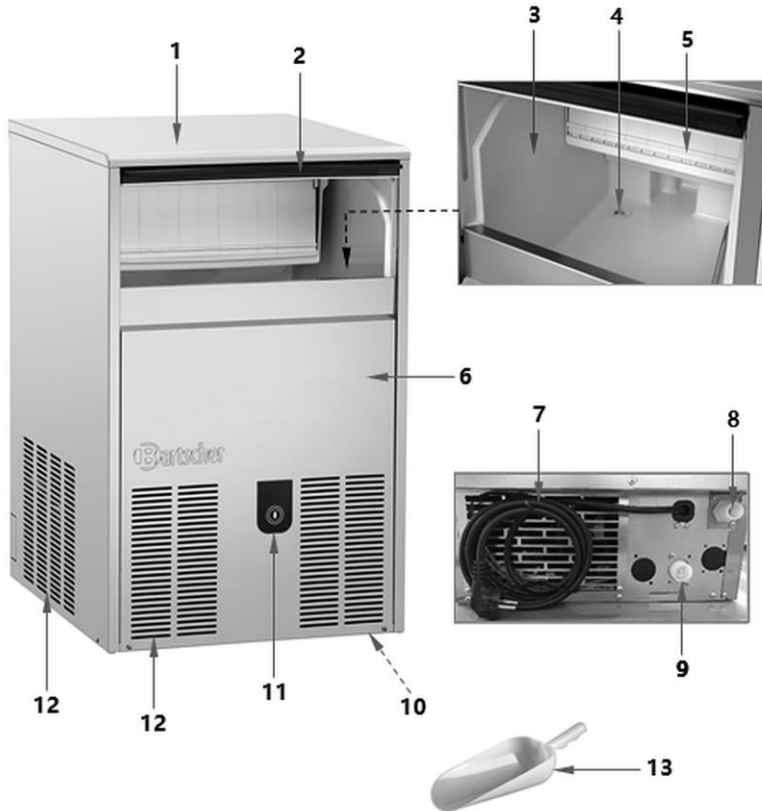

EN

- 1. Housing
- 2. Storage container lid
- 3. Storage container
- 4. Water drain opening
- 5. Lamellar curtain
- 6. Front bezel
- 7. Power cord with mains plug
- 8. Water connection
- 9. Drain port
- 10. Feet (4 pcs)
- 11. Control key
- 12. Ventilation openings
- 13. Ice shovel

4.3 Operation

When producing ice cubes in the shape of a full cone using the spray system, the supplied water is sprayed on the evaporator unit (here in the form of a water pan) with a pump. When in contact with a suitable evaporator's element water freezes, creating condensed, crystal clear, full ice cube cones. Due to its massive form they provide long-lasting cooling effect and are particularly suitable for making the best of long drinks, for they melt slowly and do not dilute beverages too fast.

The number of ice cubes in the storage container is controlled by electronic probe, which is located in the storage container. When ice cubes pile and reach the probe, the appliance automatically stops production of ice cubes. When ice cubes are removed and the probe is freed, the production of ice cubes is continued again.

NOTE!

After dispensing ice cubes from the storage container you may clean the probe off of ice remains, so that the new production process re-starts faster.

5 Installation and operation

EN

5.1 Installation



CAUTION!

Incorrect installation, positioning, operation, maintenance or misuse of the appliance may lead to personal injury or property damage.

Positioning and installation, as well as repairs may be performed by authorised technical service only and in compliance with the applicable national law.

NOTE!

The manufacturer disclaims all liability and provides no warranty for damages, which may be attributed to non-observance of regulations or incorrect installation.

Unpacking / Positioning

- Unpack the appliance, remove all external and internal packaging elements and shipment safeguards.



CAUTION!

Choking hazard!

Prevent children from accessing package materials, for instance: plastic bags and EPS.

- If the appliance is covered with a protective film, remove it. Remove the film slowly, so no glue residues are left. Remove any glue residues with the use of a suitable solvent.
- Be careful not to damage the rating plate and warning labels fixed on the appliance.
- **Never** place the appliance in humid or wet environment.
- Place the appliance in a way making the connections easily accessible, so that they may be quickly disconnected if such a need arises.
- The appliance should be placed on surfaces that are:
 - even, with sufficient bearing capacity, resistant to water, dry and resistant to high temperatures;
 - sufficiently large, and thus enabling usage of the appliance with no problems;
 - easily accessible;
 - well ventilated.
- The appliance may be loaded and unloaded with a forklift truck or a pallet truck, with the length of over half of the length of the appliance.
- The lifting equipment must be selected according to dimensions of the packed appliance/components and the weight of the appliance.
- During operation follow all the necessary precautions in order not to damage the appliance.
- Remove cardboard packaging from the wooden base, on which the appliance is standing.

- Then lift the appliance with a suitable lifting equipment (lift truck or the like) and remove the wooden base.
- Place the appliance in a suitable location.

Requirements for Place of Installation

When selecting the place of installation, provide for the following conditions:

- ambient temperature may not drop below 10°C (50°F) and rise above 43°C (110°F);
 - water temperature may not be below 10°C (50°F) nor above 32°C (90°F) (Fig. 4 at the beginning of the operating instructions);
 - water supply pressure may not be below 0.1 MPa (1 bar) nor above 0.5 MPa (5 bar). If the pressure exceeds 0.5 MPa, install a pressure reducer between water supply and the appliance (Fig. 5);
 - there may be no heat sources in the vicinity,
 - the appliance may not be subject to direct sunlight (Fig. 6);
 - the location must be free of dust, as the condenser of the cooling unit may clog rapidly (Fig. 8);
 - the fan of the cooling unit may not be covered (Fig. 8),
 - the appliance may not be installed in plunged areas, as in the case of possible leakages, the coolant will be sinking down (Fig. 15),
 - there may be no fuels, flammable nor explosive materials within the radius of 3 m, and there must be sufficient air circulation provided for (Fig. 19).
- Maintain minimum clearance from walls and other objects: 150 mm at the rear, and 50 mm at both sides (Fig. 3).
 - Level the appliance (Fig. 3). If the appliance is not levelled, it may negatively affect its functionality, as well as water supply.

EN

Water Connection

1. Install the appliance near a water connection.

ATTENTION!

Connect the appliance only to a supply connection of potable water. Otherwise install a water purification appliance.

2. Execute water connections before you execute electric connections.
3. Connect the enclosed 3/4" water drain tube to the water connection.

Installation and operation

4. Connect the other end of the tube to the water connection at the back of the appliance.

NOTE!

Due to practical and safety reasons we suggest to integrate a shut-off valve, which is not a part of the delivery (Fig. 7):

1. ON/OFF switch; 2. Socket; 3. Plug; 4. Water connection; 5. Shut-off valve;
6. Water drain from condenser: water cooling version;
7. Water drain from storage container; 8. Water drain to open water trap.

Water Drain

1. Connect the enclosed water drain tube to the drain connection at the rear of the appliance.
2. The other end of the water drain tube introduce into the open water trap (Fig. 7).

NOTE!

To provide for perfect water drain, the water drain tube must be routed at the inclination of at least 3%; at the same time make sure it is not tangled nor bent.

EN

Power supply connection

- Verify if technical data of the appliance (see rating plate) correspond with the local electric power grid specification.
- Connect the appliance to a single, properly grounded mains socket with protective contact. Do not connect the appliance to a multi-socket.
- The power cord should be laid in a way preventing anyone from threading on it or tripping against it.
- The maximum allowable tolerance for voltage difference is $\pm 10\%$ of rated value.
- The electric circuit between the appliance and the power supply connection should be equipped with a suitable multi-polar disconnecting device (Fig. 7), which is capable of providing distance of contact opening rendering full separation possible in the conditions of overvoltage category III.
- If in winter the appliance is brought from the outside to a room, leave it for a few hours to heat up and reach the room temperature before switching it on.
- Before connecting the appliance to the power supply, wait 1 hour for the coolant to stabilize.
- After a power failure or when the plug is removed from the socket, reconnect the appliance to the power supply after 5 minutes at the earliest.

5.2 Operation

Preparation of Appliance

1. Remove all accessories from the storage container (water supply tube, water drain tube, ice shovel, documentation).
2. Before use, clean the appliance observing instructions in section 6 '**Cleaning**'.
3. Dry the appliance thoroughly.

Indications for User

- If the appliance is installed in an area, where potable water features high salt content, follow the instruction to avoid possible malfunctions.
- For the ice not to take up unpleasant scent nor taste, do not store food, bottles nor anything else in the storage container.
- Do not leave the storage container lid open during normal operation.

Switching-On

EN

1. Before switching on, check if water and power connections are executed correctly.
2. Check if bands, screws, studs and clamps are securely tightened and did not come loose during transport to prevent water leaks or other malfunctions during operation.
3. Open the water connection tap and the shut-off valve.
4. Plug the appliance into a single grounded socket.

The appliance is now in standby. The control key blinks every 30 seconds.

5. To leave the Standby mode and switch the appliance on, press the control key for at least 3 seconds (Fig. 9), and wait for a long acoustic signal, confirming the appliance is on.

NOTE!

We recommend not to use ice cubes from the first 5 production cycles to chill beverages nor foods.

Never disconnect the water supply when the appliance operates; do not cover nor clog air outlet openings.

The ice-cube maker is equipped with the temperature probe located in the storage container (Fig. 14), which stops the appliance and the production of ice cubes when the probe reaches contact with ice stored in the storage container.

After dispensing ice cubes clean the probe off of ice remains, so that the new ice cubes production process re-starts faster (Fig. 14).

Setting the Size of Ice Cubes

With time, due to the change in ambient temperature in a room, the size and weight of ice cubes may change.

To set the size and weight, perform the following steps:

1. When the appliance is on, press the control key 3 times over a 2-second period (Fig. 9).

The control key lights up in white or red.

2. To increase the size or weight of ice cubes, press the control key to increase red colour of the LED.
3. To decrease the size or weight of ice cubes, keep pressing the control key until LED colour changes to white.

If the control key is not pressed during 5 seconds, the entered setting will be saved and the appliance will leave the change phase.

Setting Probe in Storage Container

With time, due to the change in ambient temperature, the set value for temperature probe in the storage container may appear to be insufficient. To set this value, proceed the following way:

1. In Standby mode, press the control key 3 times over a 2-second period (Fig. 9).

The control key lights up in white or red.

2. To increase the set temperature, press the control key and try to increase the red colour of the LED.
3. To reduce the temperature, press the control key repeatedly until its LED changes its colour to white.

If the control key is not pressed during 5 seconds, the entered setting will be saved and the appliance will leave the change phase.

Operation Status / Alarm Status Indicators

Indicator / Alarm	RED	WHITE
Too long a cooling cycle alarm	blinks 1x	ON 3"

Drain pump alarm (optionally)	blinks 1x	blinks 1x
Time extension between two production cycles alarm	blinks 2x	ON 3"
Storage container probe damage alarm	blinks 3x	ON 3"
Upload/download HACCP data — software update	blinks 3x	blinks 3x
Condenser probe damage alarm	blinks 4x	ON 3"
Evaporator probe damage alarm	blinks 5x	ON 3"
Inverted deposit–evaporator probe alarm	blinks 5x	blinks 2x
Condenser cleaning alarm	blinks 7x	ON 3"
Start phase	OFF	2 Hz lamp
Ice cube production	OFF	ON
Ice dumping	OFF	ON
Storage container full	OFF	blinks 10 s
Standby phase	OFF	blinks 30 s
Cleaning cycle alarm	OFF	ON 3"
Ozone cycle alarm (optionally)	OFF	ON 1"
Power supply malfunction alarm or no electric supply	OFF x 1"	ON 5"
Condenser high temperature alarm	ON	OFF

Indicator / Alarm	RED	WHITE
High pressure alarm	ON	OFF
Gas charge phase alarm	ON 1"	ON 1"
No water alarm	ON 3"	blinks 1x
Periodic maintenance alarm	ON 3"	ON 3"
Capacitive sensor alarm (optionally)	ON 3"	blinks 3x

OFF: LED indicator / colour always off

ON: LED indicator / colour always on

Blinking: LED indicator / colour on for 0.5 s and off for 0.5 s

Malfunctions

ATTENTION!

In the case of incorrect operation, disconnect the appliance from power and water supply. Contact an authorised service, check the appliance and have it repaired.

EN

- Check if the water supply tap is open.
- Check if the appliance is powered electrically: if the plug is properly connected, and the disconnecting device is switched on.
- Make sure there are no strange vibrations generated by loose screws.
- If you must perform tasks connected with water loss, screw tightening, etc., always switch the appliance off first, and check whether clogged drains are not the reason for leaks.
- If the appliance produces too little ice, check the condenser for cleanliness and the coolant for leaks.

- Check the storage container probe for operation: place an ice cube on a cooled probe inside the storage container; the ice-cube maker should stop within 1 minute and automatically re-start shortly after the ice cube is removed.
- Depending on the season (summer or winter), the probe may change the maximum number of ice cubes. To change the probe setting, see chapter '**Setting Probe in Storage Container**'.

6 Cleaning

6.1 Safety Instructions for Cleaning

- Before cleaning, disconnect the appliance from the power supply.
- Leave the appliance to cool down completely.
- Make sure water does not enter the appliance. Do not immerse the appliance in water or other liquids during cleaning. Do not clean the appliance with a pressurized water jet.
- Do not use any sharp or pointed, nor metal implements (knife, fork, etc.). Sharp or pointed implements may damage the appliance, and when in contact with live parts, they may cause electric shock.
- For cleaning, do not use any scouring agents that contain solvents nor corrosive cleaning agents. They may damage the surface.

6.2 Cleaning

User Cleaning

EN

1. At the end of each working day, as well as after a long period without operating the appliance, clean the appliance thoroughly.
2. Clean the housing with a soft cloth, moistened with a chlorine-free stainless steel cleaning agent.
3. Clean the internal chamber with a sponge and cloth moistened in lukewarm water and a minute amount of sodium bicarbonate.
4. Rinse in fresh water.
5. Dry the internal chamber thoroughly.

Cleaning

If the appliance is not to be used for a long time:

- switch the appliance off and disconnect it from power and water supply;
- remove the produced ice from the storage container;
- drain the entire water;
- perform thorough cleaning;
- leave the door (lid) of the storage container slightly open.

Service Cleaning

Condenser

In order to maintain performance and extend the life of the appliance, clean the condenser regularly; the condenser is located under the front cover of the appliance (Fig. 16).

Proceed the following way:

- screw the front cover retaining screws off;
- remove the front cover;
- clean the condenser with a soft brush or a vacuum cleaner;
- use the screws to secure the front cover to the appliance.

ATTENTION!

Do not use brushes nor blunt objects to clean the condenser.

EN

Water Inlet Filter

The water inlet filter must be regularly cleaned, observing the blow indications:

- close the water shut-off valve;
- unscrew water supply tube;
- use tweezers to pull the water inlet filter from the socket at the inlet of the solenoid valve;
- clean the water inlet filter under running water;
- fit the water inlet filter;
- fit water supply tube.

Cleaning and Disinfecting Cycle

To avoid problems caused by water hardness, and thus generation of impurities on parts and components that come in contact with water, the ice-cube maker is equipped with **'Self Cleaning'** function.

This function, owing to citric acid's cleaning action, makes it possible to remove limescale and impurities from the appliance.

To provide for correct cleaning of the ice-cube maker, we recommend to perform this cleaning and disinfecting cycle at least 3–4 time a year (depending on water hardness).



When using the citric acid (water + citric acid solution, see table below) maintain proper precautions and use safety gloves and safety glasses.

The cleaning and disinfecting cycle should be carried out according to the following instructions:

1. Switch the ice-cube maker off.
2. Disconnect the appliance from water supply (close the shut-off valve).
3. Remove ice cubes from the storage container.
4. Prepare a water and citric acid solution in a suitable container. Take into account the quantitative data for different models provided in the below table.

Model	Amount of citric acid (for 1 litre of water)
B28 Plus	200 g
B38 Plus	250 g
B46 Plus	350 g
B70 Plus – B86 Plus	500 g

5. Dissolve the required amount of citric acid in 1 litre of lukewarm water (max. 40°C). Make sure the citric acid dissolves in full.
6. Pour the prepared water and citric acid solution into the evaporator's container in the appliance (Fig. 17).
7. Turn the appliance on with the control key (Fig. 9).
8. Switch the appliance into Standby mode (should it not be in it already) by pressing the control key for at least 3 seconds.
9. In the Standby mode keep pressing the control key for at least 9 seconds, to start the cleaning and disinfecting cycle.

During the cleaning and disinfecting cycle the control key (white) blinks the following way: on for 1 second, then off for 3 seconds.

Cleaning

When the cleaning and disinfecting cycle is over the appliance switches to Standby mode.

10. Remove the plug of the evaporator's water pan and empty it by draining water (Fig. 18). Next, re-fit the plug.
11. Pour fresh potable water into the evaporator's pan to fill it up.
12. Repeat the cleaning and disinfecting cycle (this time without the citric acid) to remove remains of the water and citric acid solution.
13. Switch the appliance off.
14. Remove the plug on the evaporator's camber and empty the evaporator's pan by draining it (Fig. 18). Reinsert the plug.
15. Open water supply (open the shut-off valve).
16. When the cleaning and disinfecting cycle is over, rinse the storage container with fresh water.

ATTENTION!

If the cleaning and disinfecting cycle is activated accidentally (pressing the control key for at least 9 seconds) there are two methods of stopping this process:

- 1. after approx. 1 hour 40 minutes: press the control key for 3 seconds for the appliance to return to Standby mode; press the control key again for 3 seconds to start the production cycle.**
- 2. after 2 hours 30 minutes: the appliance switches to Standby mode automatically; next, press the control key for 3 seconds to start the production cycle.**

7 Possible Malfunctions

ATTENTION!

The table below contains descriptions of possible causes and solutions to malfunctions or errors during operation of the appliance. These malfunctions may be cleared by a qualified refrigeration technician.

In such a case, provide article number, model name and serial number. These data may be found in the rating plate.

Malfunction Alarm	Appliance Condition	Solution
Too long a cooling cycle alarm		Check condenser for ventilation
		Check the cooling circuit for loss of coolant
		Reducing the size of ice cubes
Time interval change between two production cycles alarm	Time interval between two production cycles changed	Check condenser for cleanliness and ventilation
		Check condenser's fan
		Check the circulation for loss of the coolant
		Reducing the size of ice cubes
No water alarm	Appliance stops or waits for another attempt of automatic start-up	Check water supply
		Check water circulation for water leaks
		Check water inlet valve for operation, clean if necessary


Possible Malfunctions

Malfunction Alarm	Appliance Condition	Solution
Filling level probe alarm	Appliance stops	Check probe connection to PCB
		Check probe integrity
		Replace the damaged probe
Periodic maintenance alarm	Appliance continues operation	Contact the service company (Reset the alarm by touching the control key for 10 seconds)
Condenser high temperature alarm	The appliance stops; the condenser's fan remains on in order to reduce the condenser's temperature	Check condenser for cleanliness and ventilation
		Check fan for operation
Condenser probe alarm	Appliance stops	Check condenser probe connection to PCB
		Replace the damaged probe
Evaporator probe alarm	Appliance stops	Check evaporator probe connection to PCB
		Replace the damaged probe
Power supply malfunction alarm or no electric supply	Appliance stops	Check electric connections and power supply
High pressure alarm	The appliance stops; the condenser's fan remains on in order to reduce the condenser's temperature	Check condenser for cleanliness and ventilation
		Check if condenser fan rotates

Malfunction Alarm	Appliance Condition	Solution
Drain pump alarm (if available)	Clogged discharge opening	Check the appliance for obstacles in discharge route
	Discharge pump damaged	Replace the discharge pump
Capacitive sensor alarm (if available)	Appliance stops	Check electric power connection
		Replace the sensor
Condenser cleaning alarm	Appliance continues operation	Clean air filter and condenser
Inverted deposit–evaporator probe alarm	Appliance stops	Check wiring on the sensor's PCB; replace the sensor's PCB if needed

8 Disposal

Electrical Appliance



Electric appliances are marked with this symbol. Electrical appliances must be disposed of and recycled in a correct and environmentally friendly manner. You must not dispose of electric appliances with household waste. Disconnect the appliance from the power supply and remove power cord from the appliance.

Electrical appliances should be returned to designated collection points.

Coolant

The propellant used in the appliance is flammable. It should be utilised pursuant to national regulations in force.