

Glass-doored refrigerator 302L WB



Could not be display!!
USP: 8



▶ Advertising display:

- ✓ LED lighting
- ✓ For stickers, max. dimensions W 600 x H 155 mm
- ✓ For printed material, max. dimensions W 495 x H 130 mm



▶ Climate class: 4

▶ 5 height-adjustable intermediate shelves

- ✓ Dimensions: W 500 x D 400 mm



▶ Automatic thawing function

▶ LED lighting



▶ Lockable

Setting the scene for targeted advertising and information: The lit advertising display catches the eye and draws the attention in shops, canteens, and dining areas. You can advertise your products with a logo or provide general information. Allowing customers to look directly at the foods on offer helps to promote impulse buys.

• Material:	Steel Painted Glass Plastic ABS	• Door hinge side can be changed:	No
• Colour:	White	• Height-adjustable feet:	No
• Content:	302 litre(s)	• ON/OFF switch:	No
• Temperature range:	0 °C to 10 °C	• Control lamp:	-
• Temperature control:	Mechanical Stepless	• Front pane:	Framed
• Thermostat:	Yes	• Type of glass:	Double glazing
• Climate class:	4	• Safety glass:	Yes
• Ambient temperature:	16 °C to 30 °C	• Important information:	-
• Drip water evaporation:	No	• Power load:	0,155 kW 230 V 50 Hz
• Energy consumption:	642 kWh / an	• Cooling:	Static with 1 fan
• GWP:	3	• Dimensions of intermediate shelves:	W 500 x D 400 mm
• Automatic defrosting function:	Yes	• Including:	1 thermometer for hanging inside
• Type of intermediate shelves:	Grille, plastic coated	• Advertising display:	LED lighting For stickers with max. dimensions of W 600 x H 155 mm For printed material with max. dimensions of W 495 x H 130 mm
• Number of intermediate shelves:	5	• Properties:	1 fan LED lighting with separate on/off switch (with advertising display) 2 casters, 2 adjustable feet
• Height-adjustable intermediate shelves:	Yes	• With price strips:	No
• Lockable:	Yes	• Material inside:	Plastic ABS
• Interior lighting:	Yes	• Coolant:	R600a / 0,052 kg
• Digital display:	No	• Insulation:	Cyclopentane C5H10, 45 mm
• Control unit:	Knob	• Energy efficiency class:	D (EU No. 2019 / 2024)
• Type of door:	Leaf door, glass	• Size:	W 600 x D 580 x H 1,845 mm
• Number of doors:	1	• Weight:	55.6 kg
• Door hinge side:	Right		



Thermometer A300

STAINLESS STEEL



- Control unit: -
- Application area: Canteens
Refrigeration cell
Freezer cell
Refrigeration cell
- Temperature range: -30 °C to 30 °C
- Design: Analogue
- With temperature sensor: No
- Designed for: Room temperature measurements
Refrigerators / upright freezers

Code-No. 292048
GTIN 4015613664262

Thermometer A500




- Application area: Canteens
Refrigeration cell
Freezer cell
Refrigerated rooms
- Temperature range: -30 °C to 50 °C
- Designed for: Room temperature measurements
Refrigerators / upright freezers
Temperature monitoring during transport and storage
- Properties: Temperature range also in Fahrenheit
With suspension device

Code-No. 292049
GTIN 4015613664286

Thermometer A250

STAINLESS STEEL

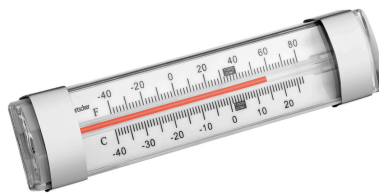

- Important information: -
- Including: -
- Material: Stainless steel
Plastic
- Colour: White
Silver
- Design: Analogue
- With temperature sensor: No
- Temperature range: -40 °C to 25 °C
- Temperature measurement units: °C
°F

Code-No. 292043
GTIN 4015613664279