
KERN KFP600V20NM

Weighing bridge, screwed, lacquered with IP67



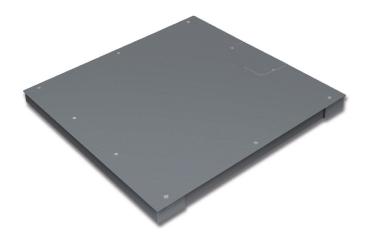

Material weighing plate: Steel lacquered Revolving screw feet: yes Weighing surface (WxD): 1500 x 1250 mm

Piktogramme

STANDARD





FACTORY



Measuring system Load cell connection: 4-wire Readability [d]: 200 g 600 kg Weighing capacity [Max]:

| Technical data about verification | | |
|-----------------------------------|---------|--|
| Minimum load [Min]: | 4 kg | |
| Periodic Verification for Italy: | 969-112 | |
| Verification by KERN possible: | yes | |
| Verification class: | III | |
| Verification value [e]: | 200 g | |

| Environmental conditions | | |
|--------------------------------|--------|--|
| Maximum operating temperature: | 40 °C | |
| Minimum ambient temperature: | -10 °C | |

| Service | | |
|--------------------|---------|--|
| DAkkS Certificate: | 963-130 | |
| Verification: | 965-230 | |

| Category | |
|----------------|-----------------|
| Brand: | KERN |
| Category: | Platforms |
| Product Group: | Weighing bridge |

| Packaging & shipping | |
|-------------------------------|----------------------|
| Delivery: | 48 h |
| Dimensions packaging (WxDxH): | 1550 x 1300 x 260 mm |
| Gross weight: | 189 kg |
| Net weight: | 148 kg |
| Shipping method: | Freight forwarder |

| Construction | |
|------------------------------|---------------------|
| Cable length: | 5 m |
| Dimensions of weighing plate | 1500 x 1250 x 80 mm |