


# KERN KIP1500V20SM

Weighing bridge with IP67

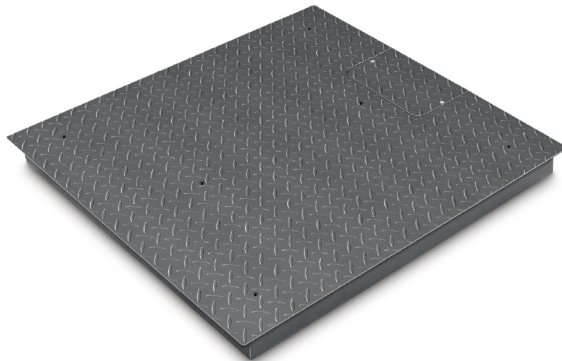

DAkkS Certificate: 963-130

Verification: 965-230

## Category

Brand: KERN

Category: Platforms

Product Group: Weighing bridge

## Packaging & shipping

Delivery: 48 h

Dimensions packaging (WxDxH): 1050 x 1050 x 260 mm

Gross weight: 150 kg

Net weight: 128 kg

Shipping method: Freight forwarder

## Construction

Cable length: 5 m

Cable length of display device: 5 m

Dimensions (WxDxH): 1200 x 1000 x 108 mm

Dimensions of weighing plate (WxDxH): 1000 x 1000 x 108 mm

Level indicator: yes

Revolving screw feet: yes

Wall mount: yes

Weighing surface (WxD): 1000 x 1000 mm

## Piktogramme

### STANDARD



### FACTORY



## Measuring system

Adjustment options: External calibration

Linearity: 1,500 kg

Load cell connection: 6-wire

Readability [d]: 500 g

Recommended adjusting weight: 1500 kg (M2)

Repeatability: 500 g

Resolution: 3000

Stabilisation time under laboratory conditions: 2 s

Tare range: -1,500 t

Warm up time: 10 min

Weighing capacity [Max]: 1,500 t

Weighing system: Strain gauge

## Display

Display digit height (large): 2,500 cm

## Technical data about verification

Minimum load [Min]: 10 kg

Verification by KERN possible: yes

Verification value [e]: 500 g

## Environmental conditions

Maximum humidity: 80 %

Maximum operating temperature: 40 °C

Minimum ambient temperature: -10 °C

Minimum humidity: 0 %

## Power supply

Mains adapter: Mains adapter external

## Service

Adjustment at the location of installation: 961-250