


# KERN KIP 3000V20M

Weighing bridge with IP67

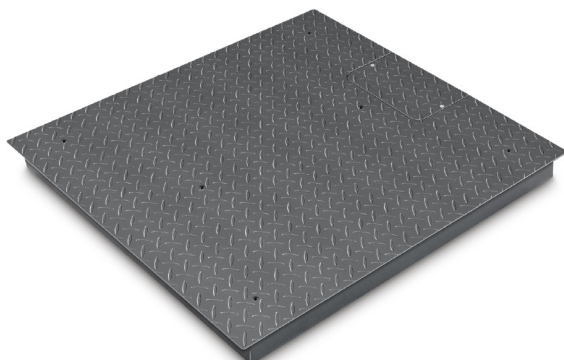

DAkkS Certificate: 963-132

Verification: 965-232

## Category

Brand: KERN

Category: Platforms

Product Group: Weighing bridge

## Packaging & shipping

Delivery: 48 h

Dimensions packaging (WxDxH): 1250 x 1550 x 270 mm

Gross weight: 178 kg

Net weight: 148 kg

Shipping method: Freight forwarder

## Construction

Cable length: 5 m

Cable length of display device: 5 m

Dimensions (WxDxH): 1200 x 1500 x 108 mm

Dimensions of weighing plate (WxDxH): 1200 x 1500 x 108 mm

Level indicator: yes

Revolving screw feet: yes

Wall mount: yes

Weighing surface (WxD): 1200 x 1500 mm

## Piktogramme

### STANDARD



### FACTORY



## Measuring system

Adjustment options: External calibration

Linearity: 3 kg

Load cell connection: 6-wire

Readability [d]: 1 kg

Recommended adjusting weight: 3000 kg (M2)

Repeatability: 1 kg

Resolution: 3000

Stabilisation time under laboratory conditions: 2 s

Tare range: -3 t

Warm up time: 10 min

Weighing capacity [Max]: 3 t

Weighing system: Strain gauge

## Display

Display digit height (large): 2,500 cm

## Technical data about verification

Minimum load [Min]: 20 kg

Verification by KERN possible: yes

Verification value [e]: 1 kg

## Environmental conditions

Maximum humidity: 80 %

Maximum operating temperature: 40 °C

Minimum ambient temperature: -10 °C

Minimum humidity: 0 %

## Power supply

Mains adapter: Mains adapter external

## Service

Adjustment at the location of installation: 961-252