


KERN KIP600V20SM

Weighing bridge with IP67

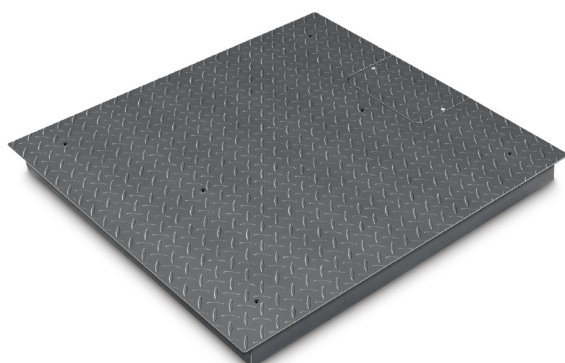

DAkkS Certificate: 963-130

Verification: 965-230

Category

Brand: KERN

Category: Platforms

Product Group: Weighing bridge

Packaging & shipping

Delivery: 48 h

Dimensions packaging (WxDxH): 1110 x 1035 x 130 mm

Gross weight: 148 kg

Net weight: 128 kg

Shipping method: Freight forwarder

Construction

Cable length: 5 m

Cable length of display device: 5 m

Dimensions (WxDxH): 1200 x 1500 x 108 mm

Dimensions of weighing plate (WxDxH): 1000 x 1000 x 108 mm

Level indicator: yes


Revolving screw feet: yes

Wall mount: yes

Weighing surface (WxD): 1000 x 1000 mm

Piktogramme

STANDARD



FACTORY



Measuring system

Adjustment options: External calibration

Linearity: 600 g

Load cell connection: 6-wire

Readability [d]: 200 g

Recommended adjusting weight: 1500 kg (M2)

Repeatability: 200 g

Resolution: 3000

Stabilisation time under laboratory conditions: 2 s

Tare range: -600 kg

Warm up time: 10 min

Weighing capacity [Max]: 600 kg

Weighing system: Strain gauge

Display

Display digit height (large): 2,500 cm

Technical data about verification

Minimum load [Min]: 4 kg

Verification by KERN possible: yes

Verification value [e]: 200 g

Environmental conditions

Maximum humidity: 80 %

Maximum operating temperature: 40 °C

Minimum ambient temperature: -10 °C

Minimum humidity: 0 %

Power supply

Mains adapter: Mains adapter external

Service

Adjustment at the location of installation: 961-250